

(LEV)

**По вопросам продаж и поддержки обращайтесь:**

Алматы (7273)495-231  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Россия +7(495)268-04-70

Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Киргизия +996(312)-96-26-47

Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Саранск (8342)22-96-24  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Казахстан +7(7172)727-132

Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35  
Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

# Overview

- 1 Micro Connectors and Harnesses
- 2 Charging Interfaces for Battery or in Frame
- 3 Power-Data Connectors and Harnesses for Battery, Motor, and Charger
- 4 Motor Interfaces
- 5 ABS and Speed Sensors



# Power-Data Battery Interfaces

---

## CONNECTION FOR MOTOR AND CHARGER

For data communication and power transmission between the battery, motor and charger, we developed our Power-Data Battery Interface Family.

With this application, you have the advantage that the power supply between the battery and the motor, as well as the connection to the charger, is established with only one interface.


When the battery is inserted, the interface connects the battery to the motor. In this state, the battery can be charged directly through the built-in interface in the frame. When the battery is removed, the built-in socket in the battery can be connected to the charging cable, allowing the battery to be charged in any location the rider desires.

The interfaces are suitable for various versions of swing-in in-tube batteries and non-swing-in frame batteries. Our patented, sophisticated connecting system convinces through an extremely compact design and a large number of mating cycles. Reliable data and power transmission even under extreme conditions such as wetness, vibrations, or shocks is a matter of course.

Various pole numbers are possible, as well as harnesses that can be individualized and adapted to the customer's needs.

**In close cooperation with our customers, we realize product requirements for optimal system integration.**

Built-in Connectors	1
Motor Harnesses	2
Charging Harnesses	3

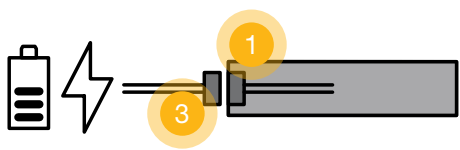

Our interfaces allow charging directly on the eBike or with the battery removed.



## 2+3 WAY POWER-DATA BATTERY INTERFACES WITH TOUCH PROTECTION



developed for eBikes, Pedelecs and applicable for various Light Electric Vehicles (LEVs).

Our Power-Data Battery Interfaces are used for data communication and power transmission between battery and motor or battery and charger. Our system includes a built-in connector (female) for mounting on the battery, a wiring harness (male) for mapping the connection to the motor and various consumers (ABS, lights, etc.), and a wiring harness (male) for mapping the connection to the charger when plugged in and out. It is suitable for swing-in in-tube batteries as well as non-swing-in frame batteries. For variants above 42 V, we offer touch protection.



### KEY FEATURES

CONTACT SYSTEM POWER PINS	2 x contact 2.8 x 0.8 mm (pre-mating)
CONTACT SYSTEM SIGNAL PINS	3 x contact 2.8 x 0.8 mm
RATED VOLTAGE POWER PINS	0 to 59 V DC
RATED VOLTAGE SIGNAL PINS	0 to 59 V DC
MAXIMUM CURRENT LOAD POWER PINS	22 A, 28 A peak
MAXIMUM CURRENT LOAD SIGNAL PINS	3 A
PROTECTION CLASS NOT MATED	IP67
PROTECTION CLASS MATED	IP54
MINIMUM OPERATING TEMPERATURE	-20° C
MAXIMUM OPERATING TEMPERATURE	+100° C
MATING CYCLE FREQUENCY	≥ 1000
MATING FORCE	ca. 22 N
CONNECTOR LOCKING	by force, no mechanical locking
CODINGS	only polarisation
TWIST PROTECTION	yes
POWER PIN WIRE CROSS SECTION	2.5 mm <sup>2</sup>
SIGNAL PIN WIRE CROSS SECTION	0.35 mm <sup>2</sup>
OVERVOLTAGE CATEGORIE	DIN EN 60664-1/II
POLLUTION DEGREE	DIN EN 60664-1/3
IP-DEGREE OF PROTECTION	IPXXB, for variants > 42 V
MATERIAL CONTACT CARRIERS	PA66+PA6 GF25
MATERIAL POTTING	PU
MATERIAL OVERMOULDING	TPU Shore A85
PULL RELIEF	yes, overmolding or potting
MINIMUM STORAGE TEMPERATURE	-20° C
MAXIMUM STORAGE TEMPERATURE	+60° C
STANDARDS	DIN EN 61984 DIN EN 50604-1 IEC 62133 partly UN 38.8 DIN EN 60335-1 DIN EN 60335-29 DIN SPEC 79009 cULus (upon request)



BUILT-IN CONNECTOR

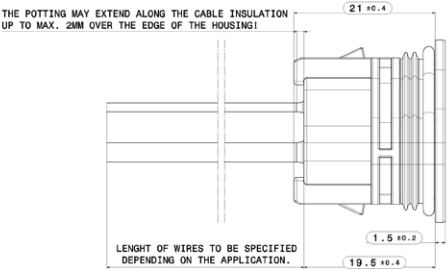

MOTOR HARNESS

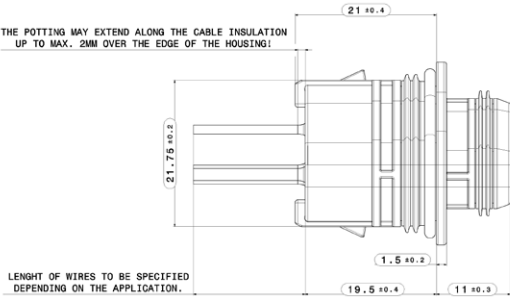

CHARGING HARNESS

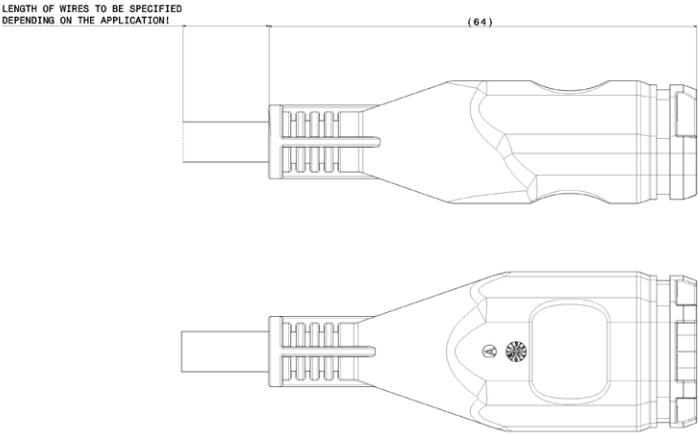

## 2+6 WAY POWER-DATA BATTERY INTERFACES

developed for eBikes, Pedelecs and applicable for various Light Electric Vehicles (LEVs).


Our Power-Data Battery Interfaces are used for data communication and power transmission between battery and motor or battery and charger. Our system includes a built-in connector (female) for mounting on the battery, a wiring harness (male) for mapping the connection to the motor and various consumers (ABS, lights, etc.), and a wiring harness (male) for mapping the connection to the charger when plugged in and out. It is suitable for swing-in in-tube batteries as well as non-swing-in frame batteries.

### KEY FEATURES


CONTACT SYSTEM POWER PINS	2 x contact 5.8 x 0.8 mm (pre-mating)
CONTACT SYSTEM SIGNAL PINS	6 x contact 1.6 x 0.6 mm
RATED VOLTAGE POWER PINS	0 to 60 V DC
RATED VOLTAGE SIGNAL PINS	0 to 60 V DC
MAXIMUM CURRENT LOAD POWER PINS	30 A
MAXIMUM CURRENT LOAD SIGNAL PINS	8 A
PROTECTION CLASS NOT MATED	IP67
PROTECTION CLASS MATED	IP67
MINIMUM OPERATING TEMPERATURE	-25° C
MAXIMUM OPERATING TEMPERATURE	+85° C
MATING CYCLE FREQUENCY	≥ 1000
MATING FORCE	ca. 22 N
CONNECTOR LOCKING	by force, no mechanical locking
CODINGS	G, H
TWIST PROTECTION	yes
POWER PIN WIRE CROSS SECTION	1, 2.5, 4 mm <sup>2</sup>
SIGNAL PIN WIRE CROSS SECTION	0.25, 0.35, 0.5, 0.75 mm <sup>2</sup>
OVERVOLTAGE CATEGORIE	DIN EN 60664-1/II
POLLUTION DEGREE	DIN EN 60664-1/3
MATERIAL CONTACT CARRIERS	PA66+PA6 GF25
MATERIAL POTTING	Fermadur B5
MOUNTING SCREW DISTANCE	23.3 x 23.3 mm
MOUNTING TORQUE SCREWS (PLASTICS)	1.1 Nm
MOUNTING TORQUE SCREWS (ALUMINIUM)	1.3 Nm
MINIMUM STORAGE TEMPERATURE	-20° C
MAXIMUM STORAGE TEMPERATURE	+60° C
STANDARDS	DIN EN 61984 DIN EN 50604-1 IEC 62133 partly UN 38.8 DIN EN 60335-1 DIN EN 60335-29 cULus (upon request)




BUILT-IN CONNECTOR

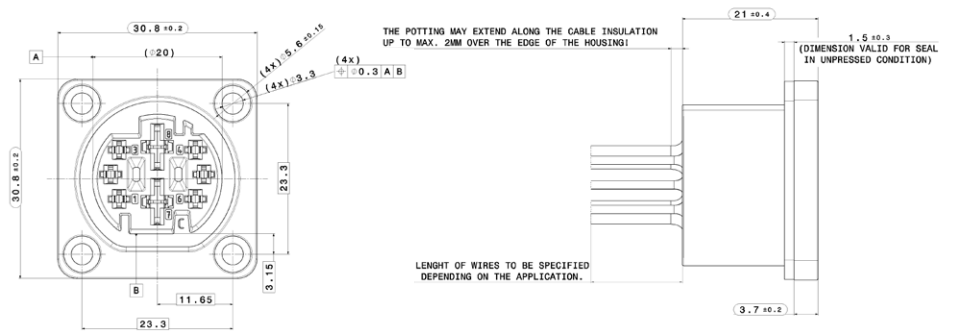

MOTOR HARNESS

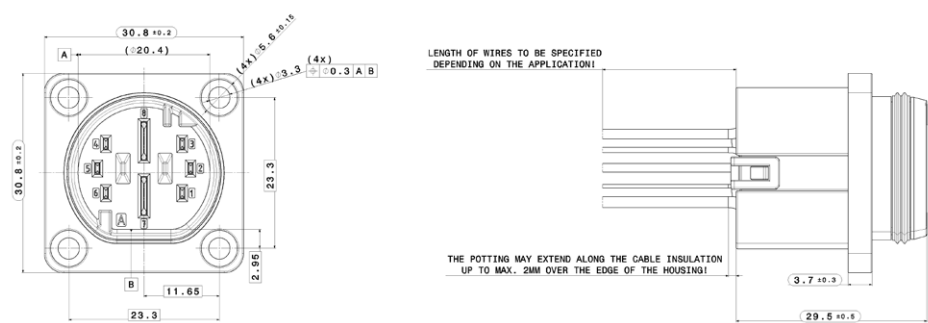

CHARGING HARNESS

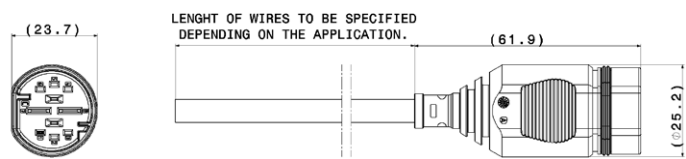

# Charging Interfaces

## FOR SAFE AND RELIABLE CHARGING

Our Charging Interfaces with up to six pins enable the connection between charger and battery. The built-in socket is used for both, the installation in the frame and directly in the rechargeable battery housing. The sealed charger harness is also suitable to charge in wet areas such as public charging stations. The interfaces convince through high IP protection classes as well as a high mating cycle capability that can be used for fast chargers up to 14 amperes. For variants above 42 V, we offer touch protection.

**In close cooperation with our customers, we realize product requirements for optimal system integration.**

- 1 Built-in Connectors
- 2 Charging Harnesses





## 2+4 WAY CHARGING INTERFACES WITH AND WITHOUT TOUCH PROTECTION


developed for eBikes, Pedelecs and applicable for various Light Electric Vehicles (LEVs).

The Charging Interfaces are responsible for the connection between the battery and the charger. They include a built-in connector (female) for mounting on the device to be charged and a wiring harness (male) for mapping the connection to the charger.


### KEY FEATURES

CONTACT SYSTEM POWER PINS	2x Ø1 mm round contact
CONTACT SYSTEM SIGNAL PINS	4x Ø1 mm round contact
RATED VOLTAGE POWER PINS	25, 36, 48, 50 V DC
RATED VOLTAGE SIGNAL PINS	12 V DC
MAXIMUM CURRENT LOAD POWER PINS	5, 7, 10, 14 A
MAXIMUM CURRENT LOAD SIGNAL PINS	2 A
PROTECTION CLASS NOT MATED	IP67
PROTECTION CLASS MATED	IPX5
MINIMUM OPERATING TEMPERATURE	-40° C
MAXIMUM OPERATING TEMPERATURE	+85° C
MATING CYCLE FREQUENCY	≥ 1000
MATING FORCE	ca. 22 N
CONNECTOR LOCKING	by force, no mechanical locking
CODINGS	A, B, C, D, E, F
TWIST PROTECTION	yes
POWER PIN WIRE CROSS SECTION	0.5, 0.75, 1 mm <sup>2</sup>
SIGNAL PIN WIRE CROSS SECTION	0.35 mm <sup>2</sup>
OVERVOLTAGE CATEGORIE	DIN EN 60664-1/II
POLLUTION DEGREE	DIN EN 60664-1/3
IP-DEGREE OF PROTECTION	IPXXB, for variants > 42 V
MATERIAL CONTACT CARRIERS	PA66+PA6 GF25
MATERIAL OVERMOULDING	TPU Shore A85
PULL RELIEF	yes, overmolding
MOUNTING SCREW DISTANCE	17.5 mm x 17.5 mm
MOUNTING TORQUE SCREWS (BUILT-IN CONNECTOR)	1.1 Nm
STANDARDS	DIN EN 61984 DIN EN 50604-1 IEC 62133 partly UN 38.8 DIN EN 60335-1 DIN EN 60335-29 cULus (upon request)


## BUILT-IN CONNECTOR

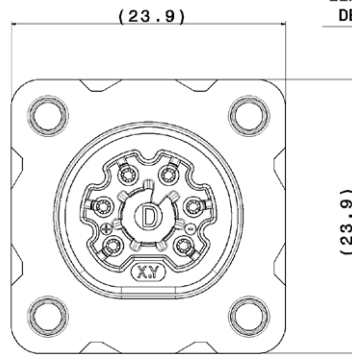

LENGTH OF WIRES TO BE SPECIFIED  
DEPENDING ON THE APPLICATION.

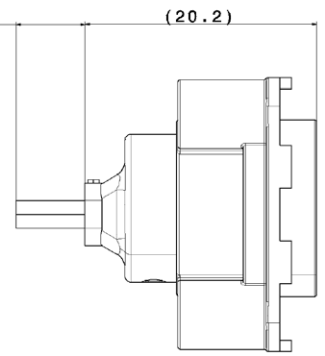

## CHARGING HARNESS

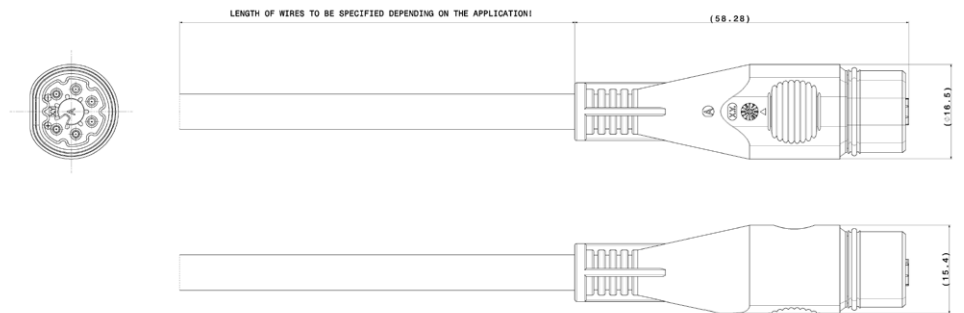

# Motor Interfaces and System Wirings

## CONNECTION BETWEEN MOTOR ELECTRONICS AND ALL PERIPHERAL MODULES

We developed a secure and efficient connection from the motor to all peripheral modules of your eBike, Pedelec, or any other LEV. Our system includes all interfaces and wirings for the battery, lights, HMI, brake switches, speed sensors, etc. A direct connection to the internal motor control board is possible. The interfaces are fully sealed and impress with their micro design. Thanks to an integrated Bluetooth module, wireless communication via an app control system is possible.

**In close cooperation with our customers, we realize product requirements for optimal system integration.**

### 1 Motor Interfaces

### 2 System Wirings for

- Brake
- Light
- HMI
- Speed Sensors
- Auxiliaries
- Battery




KEY FEATURES

IN 90° VERSION	according UL94 V-0
COUNTER PLUGS	in 90° version
CODINGS	all connectors code separately
MATING CYCLE FREQUENCY	25
IP-DEGREE OF PROTECTION	IP67 and longitudinal water tightness even the conter plugs are not installed


APPLICATION EXAMPLE

PLUG	DESCRIPTION	CONTACT POINTS	MAXIMUM LOAD	VOLTAGE
A	brake	2 way	0.2 A	e.g. 5 V DC
B	front light, rear light, brake light	4 way	2 A	6V, 12 V DC
C	speed sensor	3 way (1 reserve)	0.5 A	5 V DC
D	auxiliaries (external peripherals)	4 way	0.5 A	12 V DC
F	HMI	5 way	1 A	12 V DC
G	battery discharge	2+4 way	20/25 A 5 min	48 V DC
OPTIONS	bluetooth modul	for wireless programming		
	blind plug	for unoccupied interfaces		



blind plug

1 MOTOR INTERFACES

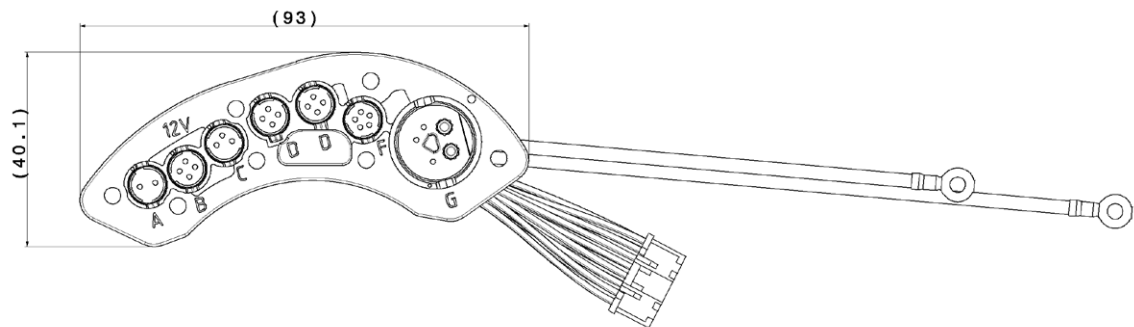

CONNECTOR A BRAKE	PIN
braker switch	2
GND	4

CONNECTOR B LIGHT	PIN
+ 6 V light	1
braking light	2
GND	3
GND	4


CONNECTOR C SPEED SENSOR	PIN
rear wheel speed out	1
rear wheel speed Vdd	2
reserve	3
GND	4

CONNECTOR D AUXILIARIES	PIN
CAN_L	1
CAN_H	2
+ 12 V	3
GND	4


CONNECTOR F HMI	PIN
+ 12 V	1
CAN_L	2
wake up	3
CAN_H	4
GND	5

CONNECTOR G BATTERY DISCHARGE	PIN
CAN_H	1
resere	2
CAN_L	3
wake up	4
VBAT	5
GND	6


2 BRAKE HARNESS

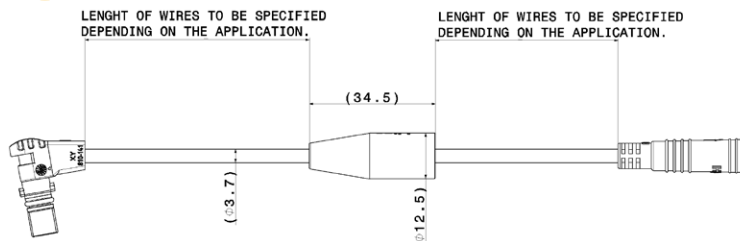


2 LIGHT HARNESS

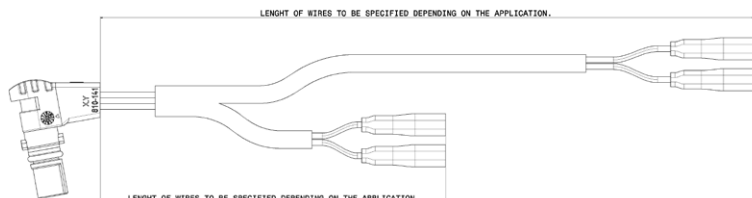


2 SPEED SENSOR HARNESS

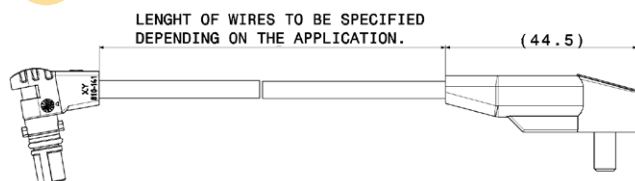


2 AUXILIARIES

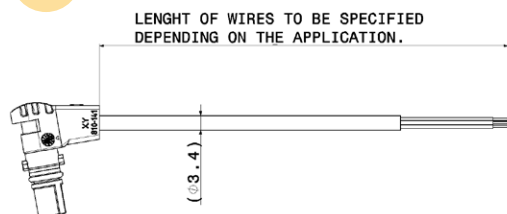

2 HMI HARNESS

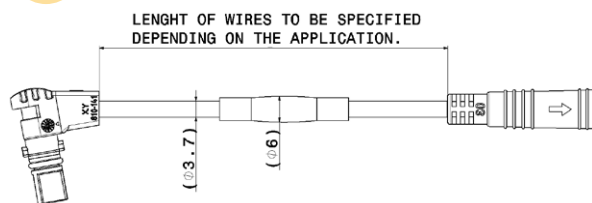

2 BATTERY DISCHARGE HARNESS

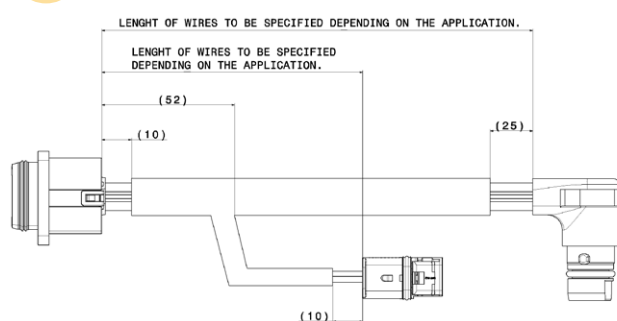



## Charger Cable Sets

The charging plug handles power and data communication between the charger and the battery. It is available with up to eight poles. The sealed charger cable set can also be used for charging processes in wet areas, for example at public charging stations.

### CHARACTERISTICS

- up to 8way interface for power and data transfer between charger and battery pack
- sealed charging cable set, suitable for outdoor use (wet area)
- for up to 5,000 mating cycles
- protected against contact (for 48 V systems)
- suitable for fast chargers
- high IP protection classes





## Micro Connectors

Our plug connectors and cable sets for power and data communications have been miniaturized.

This allows for installation inside the bicycle frame. Our products are suitable for connecting displays, brake switches, speed sensors, lights, circuits, and USB charging sockets.

They can manage currents of up to 8 amperes. The contacts of our plug connectors are vibration-resistant and completely sealed by plastic overmolding.

### CHARACTERISTICS

- connectors and cable sets for displays, brake switches, speed sensors, lights, gearshift, and USB charging socket.
- 2 to 6way connectors
- extremely compact design
- optimally suited for installation in the bicycle frame
- vibration-resistant contacts
- high IP protection class
- solutions for sheathed cables and individual cables



## ABS Sensors

ABS sensors control the brake pressure and prevent the wheels from locking. This prevents slipping and significantly increases the safety standard of an eBike.

### CHARACTERISTICS

- for detecting the speed (rotational speed) of the front and rear wheels
- sensor signal is processed in the higher-level control unit
- brake pressure is controlled and the wheel is stabilized



## Speed Sensors

The speed sensor determines the travel speed. We offer Hall- and Reed-sensors – the advantage of the Hall-technology is that it guarantees wear-free use.

The sensors are produced as complete solutions, including cables and plug connectors.

### CHARACTERISTICS

- for detecting the vehicle speed
- wear-free Hall technology in comparison to the reed switch technology usually available on the market
- complete product - sensor including cable and connector

**По вопросам продаж и поддержки обращайтесь:**

Алматы (7273)495-231	Калининград (4012)72-03-81	Омск (3812)21-46-40	Сыктывкар (8212)25-95-17
Ангарск (3955)60-70-56	Калуга (4842)92-23-67	Орел (4862)44-53-42	Тамбов (4752)50-40-97
Архангельск (8182)63-90-72	Кемерово (3842)65-04-62	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Киров (8332)68-02-04	Пенза (8412)22-31-16	Тольятти (8482)63-91-07
Барнаул (3852)73-04-60	Коломна (4966)23-41-49	Петрозаводск (8142)55-98-37	Томск (3822)98-41-53
Белгород (4722)40-23-64	Кострома (4942)77-07-48	Псков (8112)59-10-37	Тула (4872)33-79-87
Благовещенск (4162)22-76-07	Краснодар (861)203-40-90	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Красноярск (391)204-63-61	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Курск (4712)77-13-04	Рязань (4912)46-61-64	Улан-Удэ (3012)59-97-51
Владикавказ (8672)28-90-48	Курган (3522)50-90-47	Самара (846)206-03-16	Уфа (347)229-48-12
Владимир (4922)49-43-18	Липецк (4742)52-20-81	Саранск (8342)22-96-24	Хабаровск (4212)92-98-04
Волгоград (844)278-03-48	Магнитогорск (3519)55-03-13	Санкт-Петербург (812)309-46-40	Чебоксары (8352)28-53-07
Вологда (8172)26-41-59	Москва (495)268-04-70	Саратов (845)249-38-78	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Мурманск (8152)59-64-93	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Набережные Челны (8552)20-53-41	Симферополь (3652)67-13-56	Чита (3022)38-34-83
Иваново (4932)77-34-06	Нижний Новгород (831)429-08-12	Смоленск (4812)29-41-54	Якутск (4112)23-90-97
Ижевск (3412)26-03-58	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31	Ярославль (4852)69-52-93
Иркутск (395)279-98-46	Ноябрьск (3496)41-32-12	Ставрополь (8652)20-65-13	
Казань (843)206-01-48	Новосибирск (383)227-86-73	Сургут (3462)77-98-35	
Россия +7(495)268-04-70	Киргизия +996(312)-96-26-47	Казахстан +7(7172)727-132	